

**THE
ART
OF
ULTRA**

16

THE SUPER 16 RENNAISSANCE

Advances in lenses, film stock and post production technology have elevated the Super 16 film format to new levels of image quality and production efficiency. Super 16 is now routinely used for standard and high definition television productions, feature films, commercials and documentaries with stunning results. By shooting Super 16, productions gain many of the advantages of shooting film - the film look, its unsurpassed exposure latitude, natural color reproduction, variable camera speeds, ramps, proven archivability and film being the only world-wide accepted standard format - at affordable production costs. The small size and light weight of Super 16 equipment has the extra benefit of easy portability for fast paced production environments.

THE ART OF ULTRA 16

The art of cinematography is closely tied to the art of creating the cinematographer's tools. The art of successful lens design has now been advanced with the introduction of a new set of high speed, wide angle lenses: the **Ultra 16 lenses**. Like the Master Primes, the Ultra 16 lenses combine high speed with outstanding optical performance. With a widest stop of T1.3 they allow shooting in low or available light, so are easy on the lighting budget, create more natural looking images and provide the cinematic look including, where necessary, a shallow depth of field. Equaled by no other Super 16 lens in optical performance, they join the other ARRI/Zeiss lenses in elevating the Super 16 image to its highest possible quality.

All five Ultra 16 lenses (6, 8, 9.5, 12 & 14 mm) cover the full Super 16 format and are fully compatible with the optical quality, color balance and ergonomics of the other ARRI/Zeiss lenses. The Ultra 16 lenses are the perfect companions to the new Super 16 camera, the ARRIFLEX 416.

**SUPER FAST
EXTREME WIDE**





MAIN FEATURES

- **Five Modern Super 16 Primes**
 - 6, 8, 9.5, 12 & 14 mm
- **High Speed - T1.3**
 - for complete control over depth of field
 - for shooting in low or available light
 - for natural looking images
 - for fast paced production environments
 - for tight lighting budgets
- **Highest Optical Performance in its Class**
 - high contrast and resolution
 - T* XP coating ensures flare resistance
 - image geometry free of distortions
 - minimized chromatic aberration
- **Smooth & Robust Mechanics**
- **Matches other ARRI/Zeiss Lenses**
 - extending the focal range of Ultra Primes and Master Primes in the wide end for Super 16
 - same size & ergonomics as Ultra Primes
 - Super Color Matched to Ultra Primes, Master Primes, Variable Primes & Lightweight Zoom LWZ-1

HIGH SPEED

The speed of the new Ultra 16 lenses is a super fast T1.3, which allows the creation of a shallow depth of field, a look that is often sought after in other formats. Especially for wide angle lenses in Super 16, a maximum aperture of T1.3 helps in creating a shallow depth of field. In addition, T1.3 facilitates shooting on tight lighting budgets or under a lot of time pressure, common in TV drama or independent feature films. The fast speed is one of the outstanding features of these new lenses, unmatched by any other Super 16 cine lens.

OPTICAL QUALITY

Fast lenses are nothing new, but cinematographers used to pay dearly for high speed with reduced optical performance and a greater propensity to flaring. The Ultra 16 lenses, like the Master Primes, change all that by combining fast speed with outstanding optical performance at all T-stops across the whole focus range. This previously unattainable goal was made possible through new manufacturing techniques, the use of exotic glass materials and large diameter aspherical and radically shaped spherical glass surfaces. The Ultra 16 lenses exhibit high contrast, high resolution, almost no chromatic aberration (color fringes) and a great resistance to flaring. They are designed as close focus lenses, and so retain their outstanding optical qualities even at close focus (0.2m/8 inches for the 6 mm, and 0.3m/12 inches for the others).

Incorporating aspherical glass surfaces in a lens design requires ultra-high precision in manufacturing and a complex holographic measuring process which was developed specifically for the Master Primes, now benefiting all new ARRI/Zeiss lens designs. While the aspherical glass surface located inside the 12 and 14 mm Ultra 16 lenses helps in reducing spherical aberration (the inability to focus all light rays from a point source onto a point on film), the aspherical front surface of the 6, 8 and 9.5 mm keeps the image free of geometrical distortions. Straight lines stay straight, from infinity to close focus.


**CINEMATIC QUALITY
FOR SUPER 16**





A shallow depth of field is an important narrative tool for the cinematographer, and a feature sought after by other formats for its cinematic quality.



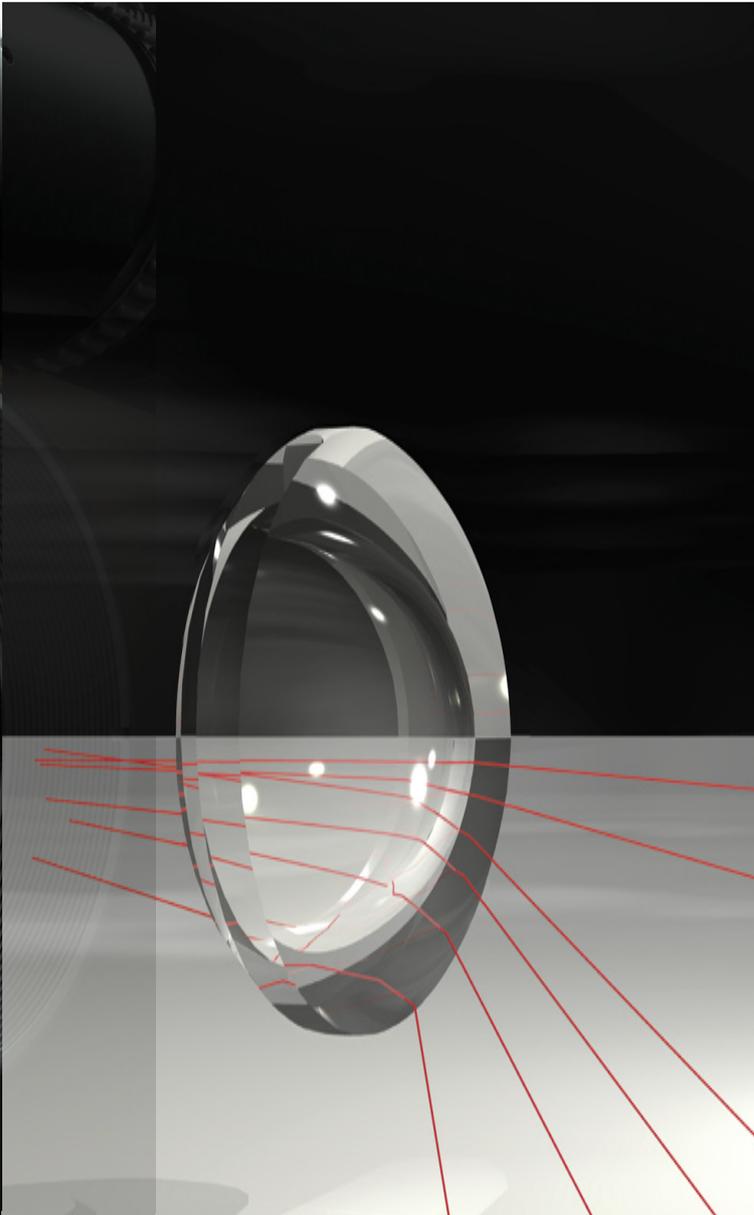


T* XP ANTI REFLEX COATING

The new T* XP multi-layer anti-reflex coating reduces flares and internal reflections and creates a pleasing, gentle color balance. Compared to conventional coatings it has a better transmission and a more uniform performance from optical center all the way to the edges, resulting in higher contrast and deeper, richer blacks.

The lens' internal construction in combination with the T* XP coating ensures that it can easily handle tricky lighting situations like strong backlight, sunsets or car headlamps. The round iris opening leads to organic looking, pleasing out-of-focus highlights, and careful optical design ensures only minimal breathing.

RADICAL SPHERICAL LENS SURFACES

The 6, 8 and 9.5 mm Ultra 16 lenses have a revolutionary small form factor, made possible through their unique front element. It has a large diameter aspherical surface on the front, while the inside is defined by a radically shaped spherical surface with a very strong curvature. Radical spherical surfaces are cutting edge technology; they are difficult to grind, tricky to polish and demand precise attention during coating. Mastering these manufacturing techniques brings the reward of incomparable optical performance at substantially reduced weight.

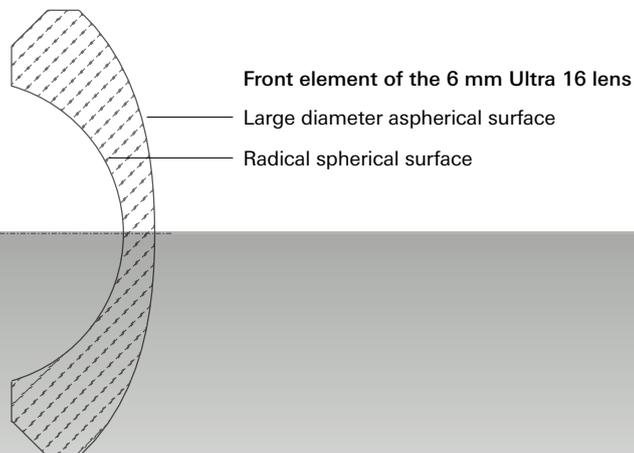

ULTRA 16 LENSES MATCH PERFECTLY

Like all other modern ARRI/Zeiss lenses, the Ultra 16 lenses have been Super Color Matched. Their optical characteristics and color balance are not only optimized for a pleasing color balance on modern film stocks, but they are also precisely matched to each other and the other ARRI/Zeiss lenses. The Ultra 16 lenses can be easily intercut with Master Primes, Ultra Primes, Variable Primes and the Lightweight Zoom LWZ-1, so the cinematographer is able to concentrate on creating a look rather than matching lenses in post.

LENS ERGONOMICS

The Ultra 16 lenses have been designed as an extension to the Ultra Primes and Master Primes in the wide end. Their size, focus and iris barrel position exactly match the Ultra Primes for fast and comfortable usage on the set. All five Ultra 16 lenses have the same 95 mm front diameter as the Ultra Primes from 16 mm through 135 mm.

The high contrast and resolution of the Ultra 16 lenses, in combination with modern film stocks, make even wide shots look great in Super 16.



**MATCHING
WIDE ANGLES**


ARRI® ULTRA 16

Ultra 16 lenses have been equipped with a blue ring and yellow scale markings to distinguish them from the Ultra Primes.

ANGLE OF VIEW COMPARISON

The illustration shows the horizontal angle of view for the Ultra 16 lenses and the Ultra Prime lenses for the Super 16 format.

-  ULTRA 16
-  ULTRA PRIMES

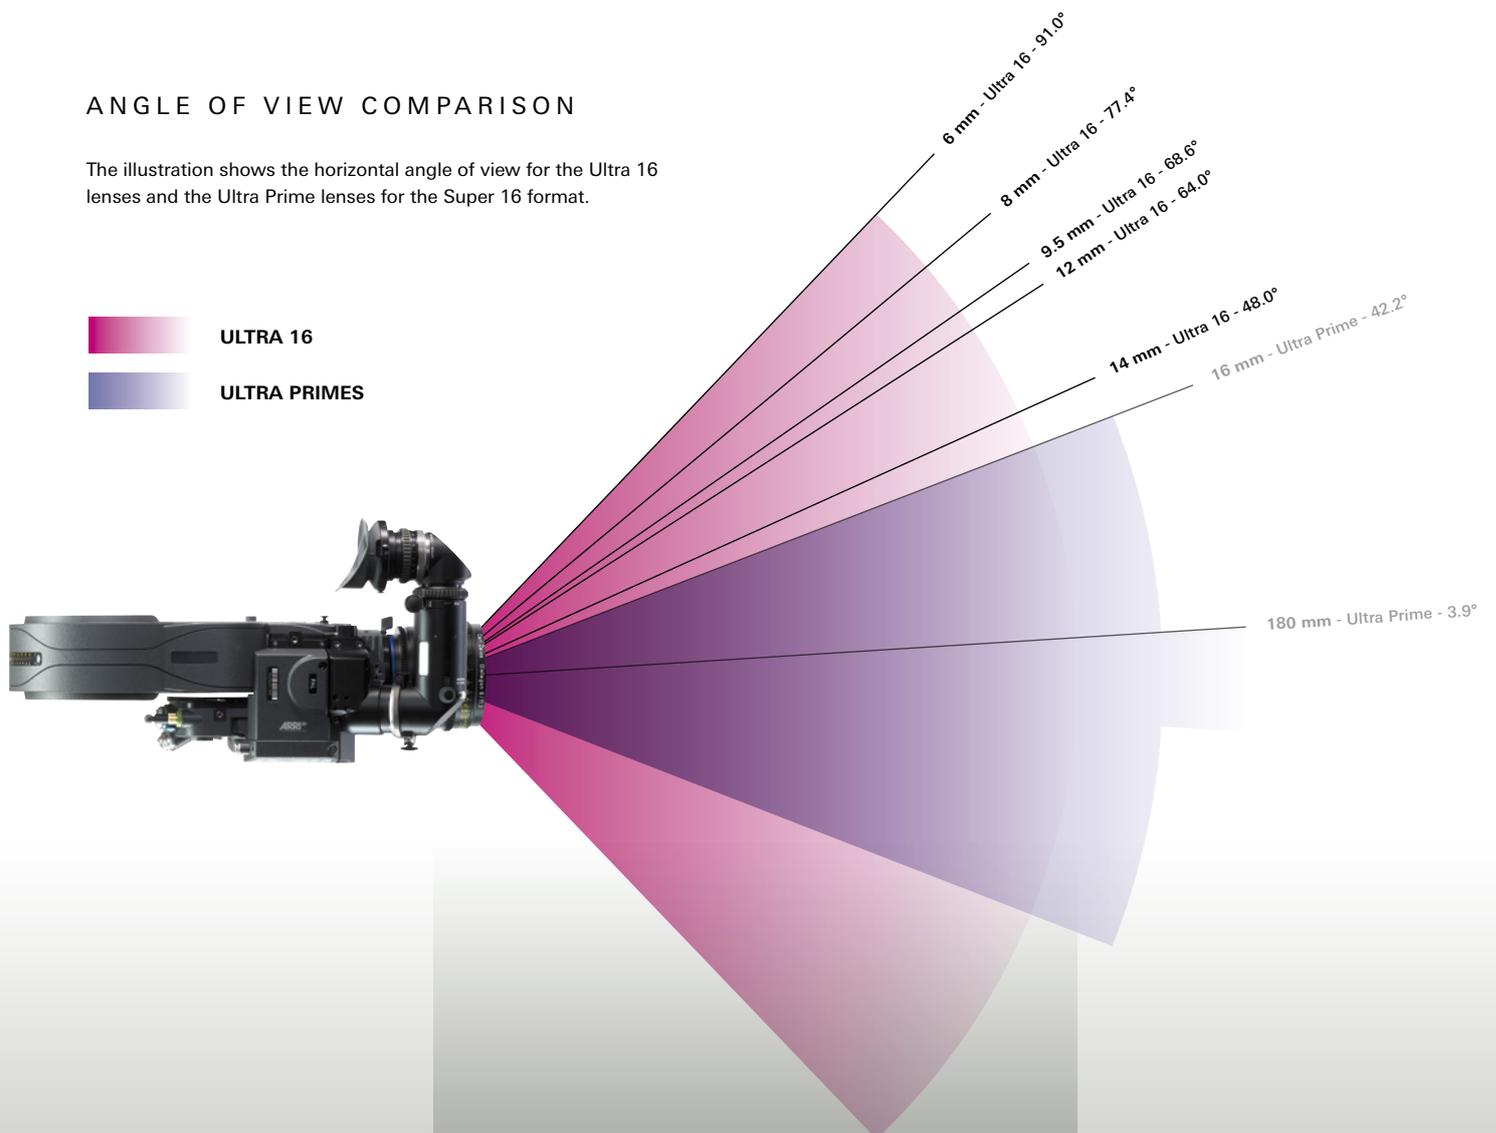

PRELIMINARY TECHNICAL DATA

Name	Type	Aperture	Close focus ⁽¹⁾	Length (lens mount to front)	Front diameter	Weight	Horiz. angle of view Super 16 ⁽²⁾
Ultra 16 T1.3/6 mm	Distagon T* XP	T1.3 to T16	0.2m / 8"	91.6mm / 3.6"	95mm / 3.7"	1kg / 2.2lbs	91.0°
Ultra 16 T1.3/8 mm	Distagon T* XP	T1.3 to T16	0.3m / 12"	91.6mm / 3.6"	95mm / 3.7"	1kg / 2.2lbs	77.4°
Ultra 16 T1.3/9.5 mm	Distagon T* XP	T1.3 to T16	0.3m / 12"	91.6mm / 3.6"	95mm / 3.7"	1kg / 2.2lbs	68.6°
Ultra 16 T1.3/12 mm	Distagon T* XP	T1.3 to T16	0.3m / 12"	91.6mm / 3.6"	95mm / 3.7"	1kg / 2.2lbs	64.0°
Ultra 16 T1.3/14 mm	Distagon T* XP	T1.3 to T16	0.3m / 12"	91.6mm / 3.6"	95mm / 3.7"	1kg / 2.2lbs	48.0°

(1) Close focus is measured from the film plane.


(2) Horizontal angle of view for a Super 16 camera aperture
(DIN 15602 and ISO-5768-1998, aspect ratio 1:1.66, dimensions 12.35mm x 7.5mm / 0.486" x 0.295").

T* XP is the trademark for the improved Zeiss anti-reflex lens coating that reduces veiling glare and other reflections. XP stands for extended performance.

All data subject to change without notice.

Ident. Numbers

Ultra 16 T1.3/6 mm with meter focus scale	K2.47560.0	Ultra 16 T1.3/6 mm with feet focus scale	K2.47565.0
Ultra 16 T1.3/8 mm with meter focus scale	K2.47561.0	Ultra 16 T1.3/8 mm with feet focus scale	K2.47566.0
Ultra 16 T1.3/9.5 mm with meter focus scale	K2.47562.0	Ultra 16 T1.3/9.5 mm with feet focus scale	K2.47567.0
Ultra 16 T1.3/12 mm with meter focus scale	K2.47563.0	Ultra 16 T1.3/12 mm with feet focus scale	K2.47568.0
Ultra 16 T1.3/14 mm with meter focus scale	K2.47564.0	Ultra 16 T1.3/14 mm with feet focus scale	K2.47569.0

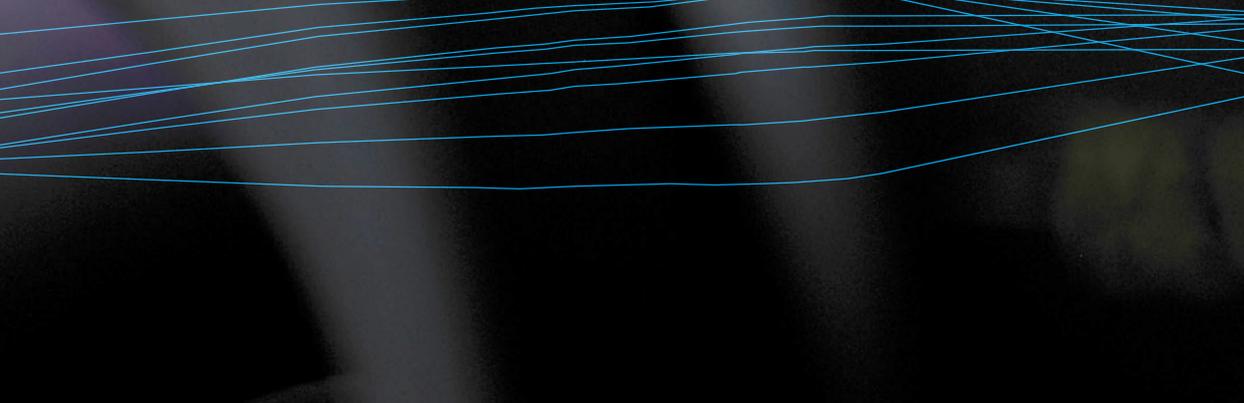

THE ART OF ULTRA 16



Germany

Arnold & Richter Cine Technik (Headquarters, Sales & Service)
Türkenstraße 89, D-80799 Munich, Germany
Vice President Sales & Marketing: Serge Giordano, sgiordano@arri.de
Tel: +49 (0)89 3809 0, Fax: +49 (0)89 3809 1791

Great Britain

ARRI GB Limited (Sales & Service)
2 Highbridge, Oxford Road, Uxbridge, Middlesex, UB8 1LX, England
Film Equipment Sales: Alan Fyfe, afyfe@arri-gb.com
Tel: +44 (0)1895 457 000, Fax: +44 (0)1895 457 001

Italy

ARRI Italia S.r.l. (Sales & Service, Milan)
Viale Edison 318, 20099 Sesto San Giovanni (Milano), Italy
Vice President: Antonio Cazzaniga, acazzaniga@arri.it
Tel: +39 (02)262 271 75, Fax: +39 (02)242 1692

ARRI Italia S.r.l. (Sales & Service, Rome)
Via Placanica 97, 00040 Morena (Roma), Italy
Camera Sales: Mauro Sembroni, msembroni@arri.it
Tel: +39 (06)79 89 021, Fax: +39 (06)79 89 02 206

USA

ARRI Inc. (Sales & Service, East Coast)
617 Route 303, Blauvelt, NY 10913-1109, USA
Vice President: Jürgen Schwinzer, jschwinzer@arri.com
Tel: +1 (845)353 1400, Fax: +1 (845)425 1250

ARRI Inc. (Sales & Service, West Coast)
600 North Victory Blvd., Burbank, CA 91502-1639, USA
Vice President: Bill Russell, brussell@arri.com
Tel: +1 (818)841 7070, Fax: +1 (818)848 4028

Canada

ARRI Canada Limited (Sales & Service)
415 Horner Ave. Unit 11 & 12, Toronto, Ontario M8W 4W3, Canada
Accounts Manager, Camera & Digital Systems:
Sébastien Laffoux, seb@arrican.com
Tel: +1 (416)255 3335, Fax: +1 (416)255 3399

Australia

ARRI Australia PTY Limited (Rental & Service)
Unit 6C, 5 Talavera Road, Macquarie Park, Sydney.
NSW 2113 Australia
General Manager: Clemens Danzer, cdanzer@arri.de
Tel: +61 (2)9855 4300, Fax: +61 (2)9855 4301

This Ultra 16 preliminary product brochure (K5.40056.0) is published by:
Arnold & Richter Cine Technik, April 01, 2006

© ARRI/2006